




Fréquency (Hz)	63	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	24.8	22.6	15.6	13.8	21.6	33.0	38.4	40.2
standard Déviation (dB)	5.8	6.1	4.6	3.8	3.6	5.5	1.7	3.8
Assumed Protection (dB)	19.0	16.5	11.0	10.0	18.0	27.5	36.7	36.4
SNR = 20dB (H=25dB, M=15dB, L=13dB)								



Ref	Gencodes
Ref 30220	3435241302205
Ref 30221	3435241302212

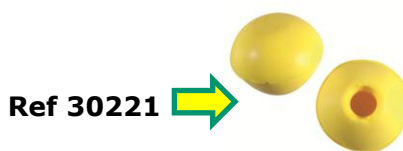

GENERAL DESCRIPTION AND MATERIALS

- Polypropylene headband
- Polyurethane foamed earplugs
- Earplug form : half sphere

SPECIFIC FEATURES

- Comfort
- Lightness
- Spare ear plugs available (ref. 30221)
- To be worn under the chin
- Easy use
- SNR 20 dB ; H 25 dB ; M 15 dB L 13 dB

MAIN APPLICATION FIELDS

- Noisy industries
- Noisy surroundings
- Advised for factory visits
- Do not wear the banded hearing protector if there is a risk of entanglement by machines in movement

PACKING METHODS

Ref 30220

- 1 headband in one polybag
- 40 headbands in an innerbox
- 10 innerboxes in one carton (400 pieces)

Ref 30221

- 200 pairs in one polybag
- 10 polybags in one carton (2000 pairs)

CE STANDARD

This headband is in conformity with the model of individual safety equipment which correspond to

The CE Type-examination certificate 2005

Issued by **INSPEC (notified body n° 0194)**



EN 352-2:2002